FWR-701

Wireless Monitor Kit with Built-in DVR

2.4 GHz wireless | 7 inch 1280 x 1024 | IP69 | loop recording | BSD optional

2.4 GHz wireless **Built-in DVR** **IP69** **BSD option**

Shenzhen Jifuan Intelligent Technology Co., Ltd.
Building 9, West District, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, China
OEM & ODM welcome - custom logo, packaging, connectors, cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)
info@jfacam.com
www.jfacam.com | www.antuvision.com

OVERVIEW

Key Features & Specifications

KEY FEATURES

- 2.4 GHz wireless link (2400-2483.5 MHz) - no video cable between the camera and the screen
- 7-inch display, 1280 x 1024, 1000 TV lines, brightness 500 cd/m2
- 1/2.7-inch starlight image sensor for a clear picture in low light
- IP69 housing, and it runs from a 12-36V battery pack or the vehicle supply
- Single, split and quad viewing modes on one screen
- Built-in DVR records 1, 2 or 4 channels; in split or quad view every channel is recorded
- Manual and timed recording with loop recording, and a REC indicator on screen
- **Menu:** brightness, contrast, hue, dimming, trigger delay and parking lines
- Each camera channel can be switched on or off individually and paired to CAM1-CAM4
- Optional BSD built into the monitor - no extra box on the machine
- **Options:** standard or 130-degree wide-angle camera, BSD with sound-and-light alarm, internal or external antenna
- For trailers, rental machines, forklifts and any machine where pulling a video cable is impractical

TECHNICAL SPECIFICATION

Display Size	7 inch
Wireless Band	4G GHz
Viewing Angle	120°
Waterproof Rating	IP67
Transmission	Digital wireless, 2.4G / 5.8G per model
Range	Open area 100-200 m depending on model
Latency	Low-latency real-time video
Power Supply	DC 12-24V or built-in battery
Ordering	Full parameter sheet available on request

STUDIO

Product Views

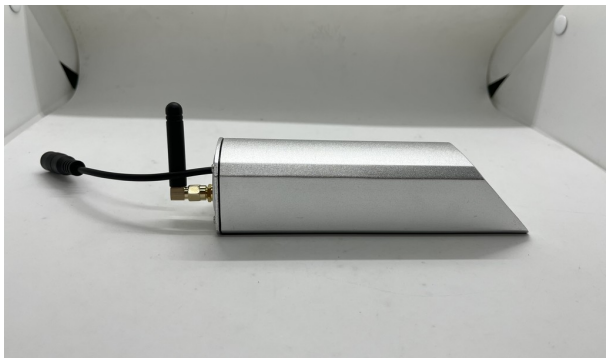

CUSTOMER FEEDBACK

Customer Feedback - Units in Service

SPECIFICATIONS

Full Technical Specification

Display Size	7 inch
Wireless Band	4G GHz
Viewing Angle	120°
Waterproof Rating	IP67
Transmission	Digital wireless, 2.4G / 5.8G per model
Range	Open area 100-200 m depending on model
Latency	Low-latency real-time video
Power Supply	DC 12-24V or built-in battery
Ordering	Full parameter sheet available on request

ORDERING NOTES

- Confirm the model, screen size or channel count, and the system voltage used on the vehicle.
- Confirm the connector your harness uses (RCA / 4-pin aviation / GX12) and the cable length.
- Confirm PAL or NTSC, image mirroring and whether reversing guide lines are required.

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, China

OEM & ODM welcome - custom logo, packaging, connectors, cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

IN USE

Product in Operation

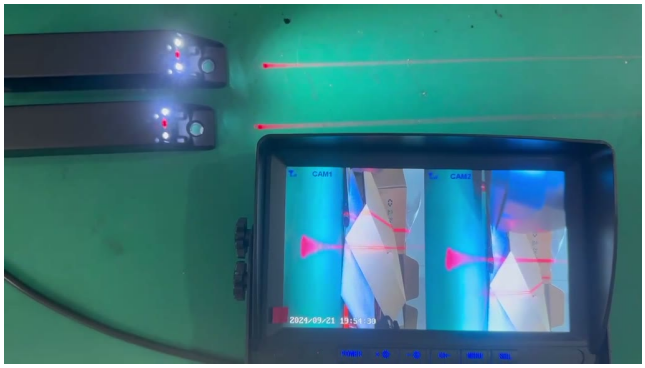

PRODUCT VIEWS

Camera Views & Mounting