

JFD-AW1

Universal Dash Camera

1 / 2 / 3 / 4 / 8 channels | SD card or 2TB SSD / HDD

No-screen 4G dual-lens dash cam **Main chipset** **4G CAT1 module Quectel EC800K** **4G bands**

Shenzhen Jifuan Intelligent Technology Co., Ltd.
Building 9, West District, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, China
OEM & ODM welcome - custom logo, packaging, connectors, cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)
info@jfacam.com
www.jfacam.com | www.antuvision.com

OVERVIEW

Key Features & Specifications

KEY FEATURES

- No-screen 4G dual-lens dash cam: front + rear camera
- **Main chipset:** Allwinner V853 Cortex-A7 @1.2GHz
- Front camera 2560 x 1440@25fps; rear camera 1280 x 720@25fps
- Front view angle 150 degree, rear 130 degree
- 4G CAT1 module Quectel EC800K
- **4G bands:** FDD-LTE B1/3/5/8, TDD-LTE B38/B39/B40/B41

TECHNICAL SPECIFICATION

Channels	1 / 2 / 3 / 4 / 8 channels (per model)
Storage	SD card or 2TB SSD / HDD (per model)
Connectivity	4G, GPS, WiFi, ADAS / DMS optional
Video Input	AHD 1080P / 720P, IPC supported
Power Supply	DC 12-24V

SELLING POINTS & NOTES

Selling Points, Ordering & Usage Notes

PRODUCT SELLING POINTS

- GPS function and WiFi hotspot support
- Free Cloudspirit App for live view and configuration
- 4G live streaming, video capture, image capture, park monitor
- Two-way talkie (built-in MIC and speaker)
- Max TF card 512G with Class 10 or above
- Video format TS H.264; audio recording support

ORDERING NOTES

- **Video system:** confirm AHD 720P / 1080P or CVBS, and PAL / NTSC before ordering.
- **Image mode:** confirm mirror or non-mirror image, and whether parking guide lines are required.
- **Connector:** confirm 4-pin aviation or RCA, plus cable length (standard 0.3-0.5 m pigtail; 1 m / 5 m / 10 m available) and pinout for your harness.
- Lens angle and mounting position: confirm the required angle and where the camera is fitted (side / rear / front / cabin).
- **Voltage:** confirm your vehicle system - 12V and 24V versions are both available.
- Quantity, packing (colour box / neutral box) and printing or logo requirements.
- **Mounting bracket:** confirm the bracket type and screw thread your vehicle needs.
- Default specification has no parking guide lines. Other angles, NTSC or mirror versions must be confirmed in advance.

USAGE & PRECAUTIONS

- Check the supply voltage and polarity before connecting power; wrong wiring can damage the camera.
- Keep the waterproof connector tight and seal the joint; do not cut or extend the pigtail.
- Route the cable away from heat sources, sharp edges and moving parts, and secure it with clips.
- Clean the lens and the IR window with a soft cloth only; avoid high-pressure washing directly at the lens or connector.
- Do not open the sealed housing - doing so voids the waterproof rating and the warranty.
- A dirty lens or IR window reduces night image quality, so check them during regular maintenance.

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, China

OEM & ODM welcome - custom logo, packaging, connectors, cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com


IN DETAIL

Product Views & Applications







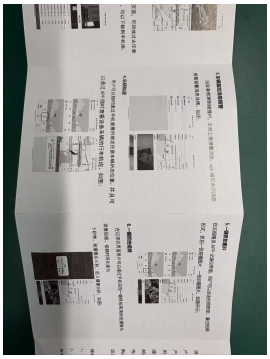

TYPICAL APPLICATIONS

Fleet Telematics | Trucks & Trailers | Buses & Coaches | Taxis & Ride-Hailing | Insurance & Evidence

CUSTOMISATION AVAILABLE

- **Channels and camera type:** confirm 1 / 2 / 3 / 4 / 8 channels and camera model.
- **Storage:** SD card or 2TB SSD / HDD; confirm recording days required.
- **Connectivity:** 4G, GPS, WiFi, ADAS / DMS - confirmed per order.
- **Platform:** confirm whether our CMSV platform is required (license cost separate).
- **Branding:** neutral or customer-branded packaging and labels.