


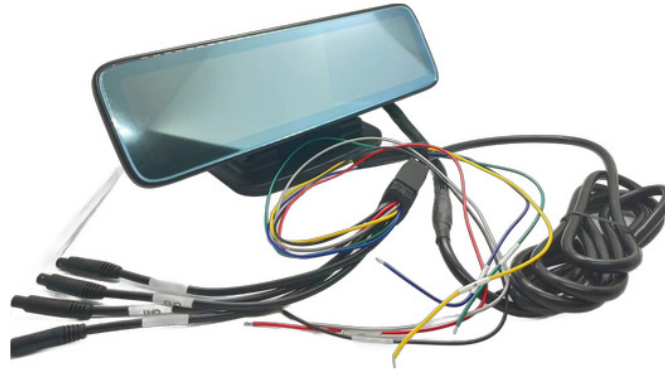

JFD-W14

12 Inch 4 Channel Mirror Touch 4G GPS AHD Dash Camera

1920 x 440 | 12 inch | 4 channels | 512G

Built-in local navigation

Camera view angle 120 degree

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China

OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

Key Features & Specifications

KEY FEATURES

- 4-channel heavy-duty dash cam / vehicle recorder, about 2.5 kg
- Records front, cabin, left and right cameras simultaneously
- ADAS (advanced driver assistance) included as standard
- Built-in local navigation
- Bluetooth function built in (no CarPlay)
- Camera view angle 120 degree

TECHNICAL SPECIFICATION

Resolution	1920 x 440
Display Size	12 inch
Channels	4 channels
Image Mode	12inch 1920*440 4ch 4g gps mirror monitor
Radar Frequency	2.0 GHz
Wireless Band	2.0 GHz
Storage	512G
Power Supply	DC 9-36 V
Connector	truck version is optional (with the aviation connector)
Connectivity	4G, GPS, WiFi, ADAS / DMS optional
Video Input	AHD 1080P / 720P, IPC supported

ORDERING REFERENCE / AVAILABLE VARIANTS

12inch 1920*440 4ch 4g gps mirror monitor without cmsv license and server cost CAT4 1.11.88inch Touch IPS screen,1920x440P,MIPi interface 2.CPU: AutoChip AC8257 Cortex-A53 Quad Core 2.0GHz 3.Android 9.0 with RAM2+ ROM32G 4.4CHS video recording (front,right,left,and back camera AHD 720P) 5.Mobile app monitor: Car Assist 6.Max SD card is 512G with class 10 or above 7.Support

Selling Points, Ordering & Usage Notes

PRODUCT SELLING POINTS

- Loop recording with memory card storage, video export for incident review
- Parking monitoring for up to 60 minutes
- Working current about 1.5A @12V; parking mode about 1mA @12V
- Metal housing built for trucks, buses and engineering vehicles
- 720P high-definition AHD video output for a clear, detailed picture
- Wireless / 4G-GPS transmission for easy install and remote viewing

ORDERING NOTES

- **Video system:** confirm AHD 720P / 1080P or CVBS, and PAL / NTSC before ordering.
- **Image mode:** confirm mirror or non-mirror image, and whether parking guide lines are required.
- **Connector:** confirm 4-pin aviation or RCA, plus cable length (standard 0.3-0.5 m pigtail; 1 m / 5 m / 10 m available) and pinout for your harness.
- Lens angle and mounting position: confirm the required angle and where the camera is fitted (side / rear / front / cabin).
- **Voltage:** confirm your vehicle system - 12V and 24V versions are both available.
- Quantity, packing (colour box / neutral box) and printing or logo requirements.
- **Mounting bracket:** confirm the bracket type and screw thread your vehicle needs.
- Default specification has no parking guide lines. Other angles, NTSC or mirror versions must be confirmed in advance.

USAGE & PRECAUTIONS

- Check the supply voltage and polarity before connecting power; wrong wiring can damage the camera.
- Keep the waterproof connector tight and seal the joint; do not cut or extend the pigtail.
- Route the cable away from heat sources, sharp edges and moving parts, and secure it with clips.
- Clean the lens and the IR window with a soft cloth only; avoid high-pressure washing directly at the lens or connector.
- Do not open the sealed housing - doing so voids the waterproof rating and the warranty.
- A dirty lens or IR window reduces night image quality, so check them during regular maintenance.

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China
*OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.*

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

Product Views & Applications



TYPICAL APPLICATIONS

Fleet Telematics

Trucks & Trailers

Buses & Coaches

Taxis & Ride-Hailing

Insurance & Evidence

CUSTOMISATION AVAILABLE

- **Channels and camera type:** confirm 1 / 2 / 3 / 4 / 8 channels and camera model.
- **Storage:** SD card or 2TB SSD / HDD; confirm recording days required.
- **Connectivity:** 4G, GPS, WiFi, ADAS / DMS - confirmed per order.
- **Platform:** confirm whether our CMSV platform is required (license cost separate).
- **Branding:** neutral or customer-branded packaging and labels.