



JFD-W26

4 Channel DMS ADAS 4G GPS Dash Camera

150° | 4 channels | 512G

4G CAT4 module Quectel EC200A-EU

4G bands

ADAS function

BSD blind spot detection support

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China

*OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.*

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

Key Features & Specifications

KEY FEATURES

- 4-channel 4G dash cam with 3.0 inch IPS touch screen (360 x 640, MIPI interface)
- Front camera 2K / 2560 x 1440@25fps; other channels 1920 x 1080@25fps
- Main chipset SA230 Arm Cortex-A7 CPU + RISC-V CPU
- 4G CAT4 module Quectel EC200A-EU
- **4G bands:** FDD-LTE B1/B3/B5/B7/B8/B20/B28, TDD-LTE B38/B40/B41
- GPS + Beidou positioning with GPS tracking

TECHNICAL SPECIFICATION

Channels	4 channels
Viewing Angle	150°
Storage	512G
Connectivity	4G, GPS, WiFi, ADAS / DMS optional
Video Input	AHD 1080P / 720P, IPC supported
Power Supply	DC 12-24V

ORDERING REFERENCE / AVAILABLE VARIANTS

4ch 2K ADAS DMS 4g gps dashcam CAT4 without server and cmsv 2k+1k+1k+1k 1. Maximum support for 4 cameras recording 2. 4g network band: FDD FDD:B1/B3/B5/B7/B8/B20 /B28 TDD:B38/B40/B41 3. video quality: Maximum 4K. 4. view angle: Maximum 150 degree 5. max SD card: 512g tf card 6. DMS function: (smoking, yawning, no driver, look right, look left, look down, phone use, block the camera)

Selling Points, Ordering & Usage Notes

PRODUCT SELLING POINTS

- WiFi 802.11b/g/n 2.4GHz with hotspot support
- **ADAS function:** lane departure warning, front vehicle collision warning, front vehicle move warning
- BSD blind spot detection support
- Protocol JT808 / JT1078; can work with the CMSV6 platform
- 4G live streaming, video capture, image capture, park monitor
- Two-way talkie (built-in MIC and speaker), audio recording support

ORDERING NOTES

- **Video system:** confirm AHD 720P / 1080P or CVBS, and PAL / NTSC before ordering.
- **Image mode:** confirm mirror or non-mirror image, and whether parking guide lines are required.
- **Connector:** confirm 4-pin aviation or RCA, plus cable length (standard 0.3-0.5 m pigtail; 1 m / 5 m / 10 m available) and pinout for your harness.
- Lens angle and mounting position: confirm the required angle and where the camera is fitted (side / rear / front / cabin).
- **Voltage:** confirm your vehicle system - 12V and 24V versions are both available.
- Quantity, packing (colour box / neutral box) and printing or logo requirements.
- **Mounting bracket:** confirm the bracket type and screw thread your vehicle needs.
- Default specification has no parking guide lines. Other angles, NTSC or mirror versions must be confirmed in advance.

USAGE & PRECAUTIONS

- Check the supply voltage and polarity before connecting power; wrong wiring can damage the camera.
- Keep the waterproof connector tight and seal the joint; do not cut or extend the pigtail.
- Route the cable away from heat sources, sharp edges and moving parts, and secure it with clips.
- Clean the lens and the IR window with a soft cloth only; avoid high-pressure washing directly at the lens or connector.
- Do not open the sealed housing - doing so voids the waterproof rating and the warranty.
- A dirty lens or IR window reduces night image quality, so check them during regular maintenance.

Shenzhen Jifuan Intelligent Technology Co., Ltd.




Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China
*OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.*

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

Product Views & Applications

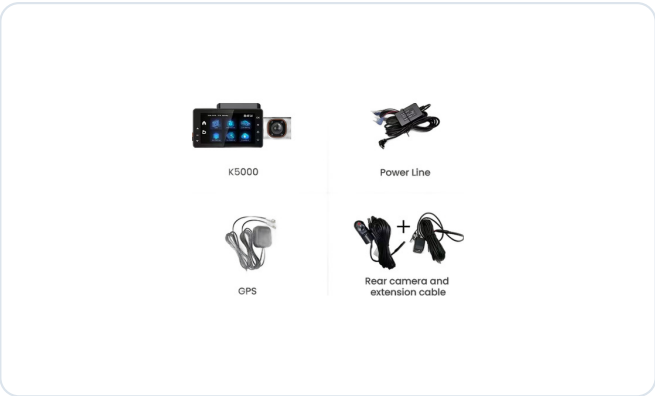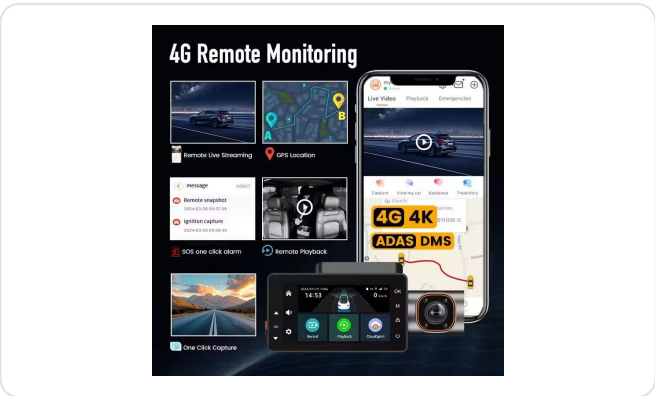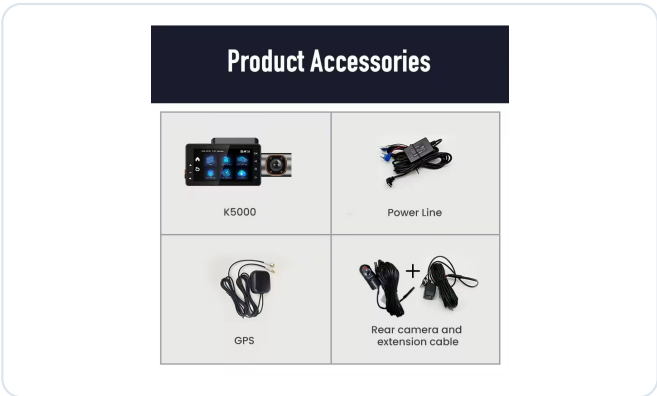

TYPICAL APPLICATIONS

- Fleet Telematics
- Trucks & Trailers
- Buses & Coaches
- Taxis & Ride-Hailing
- Insurance & Evidence

CUSTOMISATION AVAILABLE

- Channels and camera type:** confirm 1 / 2 / 3 / 4 / 8 channels and camera model.
- Storage:** SD card or 2TB SSD / HDD; confirm recording days required.
- Connectivity:** 4G, GPS, WiFi, ADAS / DMS - confirmed per order.
- Platform:** confirm whether our CMSV platform is required (license cost separate).
- Branding:** neutral or customer-branded packaging and labels.