



JPA-BRL

Metal Housing Camera

Vehicle camera system for trucks, buses and commercial vehicles

AHD / CVBS output

OEM & ODM

12V DC input

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China

OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

Key Features & Specifications


KEY FEATURES

- Metal housing + epoxy-sealed electronics: waterproof, dustproof and shock resistant (IP67)
- High decibel output - YS-BR-L 107 dB / YS-BR-S 102 dB (+/-4 dB @1.2M), cuts through ambient noise
- Wide 9-32 VDC input, works on 12 V and 24 V vehicles
- Compact body (YS-BR-L 127 x 41.5 x 76.5 mm / YS-BR-S 105 x 41.5 x 76.5 mm), flexible mounting options
- Standard line length 220 +/- 15 mm, open wire; DT / AMP connectors optional
- Voltage polarity reverse protection; CE and RoHS compliant

TECHNICAL SPECIFICATION

DSP Chipset	FH8536H + GC2053 (2053 + 8536H)
Video Output	AHD / CVBS selectable, PAL & NTSC
Connector	4-pin aviation (RCA optional)
Power Supply	DC 12V standard (8-15V working range)
Housing	Metal housing, sealed against water and dust

Product Views & Applications

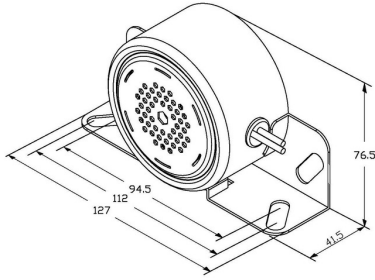

TYPICAL APPLICATIONS

Passenger Cars

Taxis & Ride-Hailing

Vans & Light Commercial

Parking Assistance

CUSTOMISATION AVAILABLE

- **Video system:** AHD 720P / 1080P or CVBS, PAL & NTSC - confirmed per order.
- **Connector:** 4-pin aviation / RCA / waterproof plug, with matching cable.
- **Cable length and pinout:** standard pigtail; 1 m / 5 m / 10 m or custom.
- **Image mode:** mirror or non-mirror image, with or without parking lines.
- **Branding:** neutral or customer-branded packaging.