



## JPM-07D

### Truck Monitor with Two Camera Inputs and Reverse Trigger

7 inch | 2 video + 1 audio | AHD and CVBS | 9-32V | EWW or IPS panel

2 CH + audio

EWW / IPS panel

Reverse trigger

9-32V

#### Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,  
Longhua District, Shenzhen, China  
*OEM & ODM welcome - custom logo, packaging, connectors,  
cable length and firmware available on request.*

+86 188 7400 7838 (WhatsApp / WeChat)

[info@jfacam.com](mailto:info@jfacam.com)

[www.jfacam.com](http://www.jfacam.com) | [www.antuvision.com](http://www.antuvision.com)

## Key Features & Specifications


### KEY FEATURES

- **7-inch digital screen, 16:** 9, 1024 x RGB x 600
- **Two panel options:** EWV at 400 cd/m2, or IPS at 500 cd/m2 with a clearer side view
- **IPS version:** 180 degrees up, down, left and right - driver and co-driver both read it without wash-out
- **Inputs:** two video plus one audio, so two cameras and sound run on one screen
- **Trigger wire:** selecting reverse switches straight to the reversing picture
- PAL / NTSC switches automatically and AHD input is supported
- On-screen menu for brightness, contrast, colour, volume, language and reverse delay
- **Power:** 9-32V DC, one part for both 12V and 24V vehicles
- 5 W consumption - a long shift on standby does not drain the battery
- Detachable sunshade, remote control, power cable and manual included
- **Connectors:** RCA or 4-pin aviation, chosen to match your harness
- Same platform in 1 / 2 / 4-channel versions for fleet projects

### TECHNICAL SPECIFICATION

|                          |                                              |
|--------------------------|----------------------------------------------|
| <b>Display</b>           | Ratio 7"high digital new panel ,16:9image    |
| <b>Power Supply</b>      | requirement Input 9V-36DC/output, 12V        |
| <b>Power Consumption</b> | 7W                                           |
| <b>Storage</b>           | temperature -30°C to 80°C                    |
| <b>Dimensions</b>        | 172x115x24 mm                                |
| <b>Video Input</b>       | AHD / CVBS, 1ch or multi-channel (per model) |
| <b>Housing</b>           | Vehicle-mounted housing with bracket         |
| <b>Ordering</b>          | Full parameter sheet available on request    |

## Dimensions & Mounting Drawing


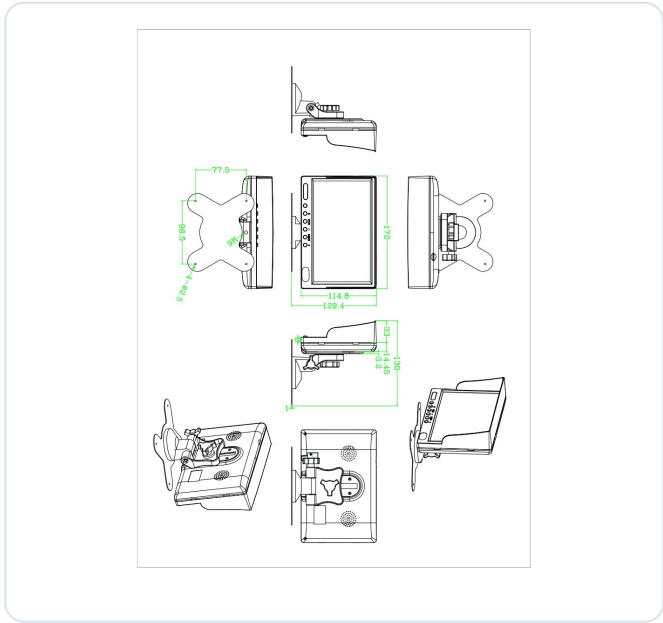


*Supplier dimension drawing - confirm the mounting hole pattern and the clearance behind the unit before ordering.*

Product Views



# Installed and Working in Service

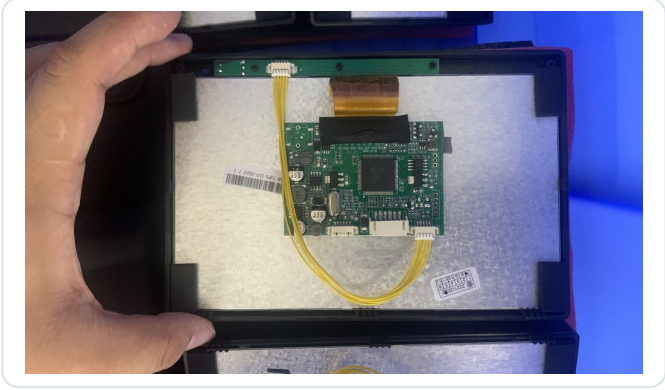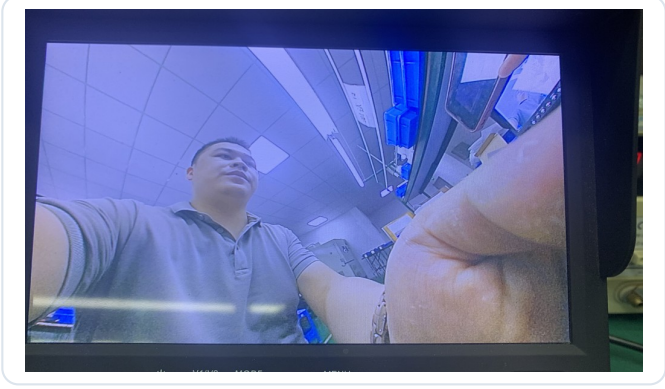

SPECIFICATIONS

Full Technical Specification

|                   |                                              |
|-------------------|----------------------------------------------|
| Display           | Ratio 7"high digital new panel ,16:9image    |
| Power Supply      | requirement Input 9V-36DC/output, 12V        |
| Power Consumption | 7W                                           |
| Storage           | temperature -30°C to 80°C                    |
| Dimensions        | 172x115x24 mm                                |
| Video Input       | AHD / CVBS, 1ch or multi-channel (per model) |
| Housing           | Vehicle-mounted housing with bracket         |
| Ordering          | Full parameter sheet available on request    |

ORDERING NOTES

- Confirm the model, screen size or channel count, and the system voltage used on the vehicle.
- Confirm the connector your harness uses (RCA / 4-pin aviation / GX12) and the cable length.
- Confirm PAL or NTSC, image mirroring and whether reversing guide lines are required.

Shenzhen Jifuan Intelligent Technology Co., Ltd.




Building 9, West District, Zhangge Community, Fucheng Street,  
Longhua District, Shenzhen, China  
OEM & ODM welcome - custom logo, packaging, connectors,  
cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

# Product in Operation

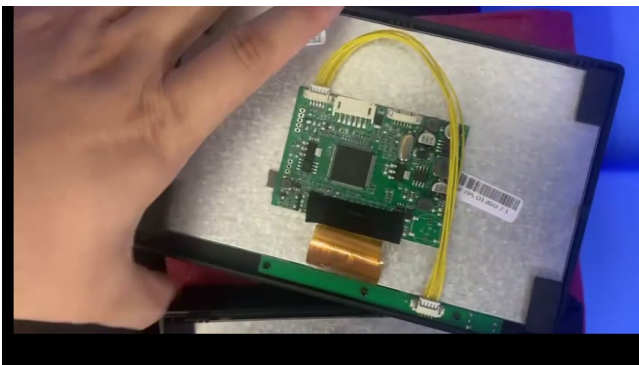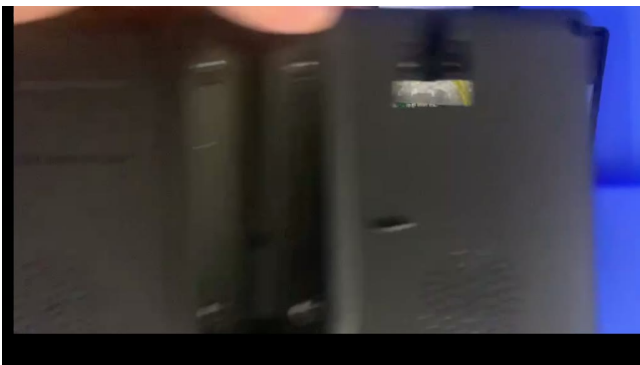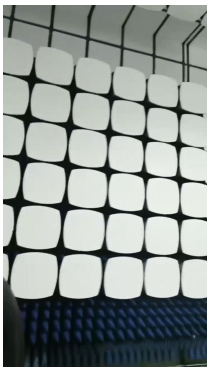

# Camera Views & Mounting

