



JPM-07E

A/B Pillar Mirror Monitor with Split Recording

7 inch IPS | 2 AHD cameras | SD recording to 256 GB | 12-32V | desk or hanging mount

A/B pillar mount

H.264 recording

256 GB SD

12-32V

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China

*OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.*

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

OVERVIEW

Key Features & Specifications

KEY FEATURES

- 7-inch IPS high-brightness screen, 1024 x 600, 600 cd/m2, brushed front panel
- Made for the A and B pillar of trucks: desk mount or hanging mount, out of the driver sight line
- Compact 108 x 187 x 29 mm and about 800 g, so it takes no dashboard space
- Horizontal or vertical (mirror) housing - choose the form that matches the cab
- AHD split-screen recording from two CVBS or AHD cameras, H.264 compression
- Records 720P on two channels to an SD card up to 256 GB; single-view version has no recorder
- Reversing trigger locks the picture to AV2 when reverse gear is selected
- Playback by channel and time - useful for incident and insurance reviews
- Wide DC 12-32V input with a 12V output that powers the cameras, so one feed runs the kit
- 12-pin waterproof connector: AV1, AV2, power, ground, CAM1 power, CAM2 power, reverse signal
- Aviation self-locking plug resists water, vibration, heat and oil
- **Options:** 1 / 2 / 4-split, reverse guide lines, reverse delay 0-20 s, per-channel mirror

TECHNICAL SPECIFICATION

Display Size	7"/9"/10.11"
Viewing Angle	L/R/U/D 85/85/85/85
Brightness	550 cd/m ²
Recording	Display Mode: Single/Dual/Triple/Quad Screen Display
Video Input	4-channel Video (CVBS/720P/1080P fully compatible)
Resolution	1024 x 600
Channels	2 channels
Power Supply	High-low voltage protection&short circuit protection
Connector	RCA/ 4pin connector (Optional)
Display	TFT LCD with LED backlight
Housing	Vehicle-mounted housing with bracket

Product Views



SPECIFICATIONS

Full Technical Specification

Display Size	7"/9"/10.11"
Viewing Angle	L/R/U/D 85/85/85/85
Brightness	550 cd/m²
Recording	Display Mode: Single/Dual/Triple/Quad Screen Display
Video Input	4-channel Video (CVBS/720P/1080P fully compatible)
Resolution	1024 x 600
Channels	2 channels
Power Supply	High-low voltage protection&short circuit protection
Connector	RCA/ 4pin connector (Optional)
Display	TFT LCD with LED backlight
Housing	Vehicle-mounted housing with bracket

ORDERING NOTES

- Confirm the model, screen size or channel count, and the system voltage used on the vehicle.
- Confirm the connector your harness uses (RCA / 4-pin aviation / GX12) and the cable length.
- Confirm PAL or NTSC, image mirroring and whether reversing guide lines are required.

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China
OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.






+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com



Product in Operation

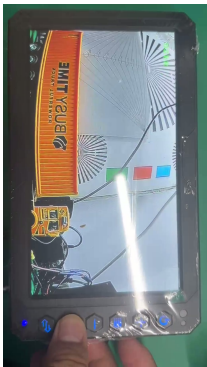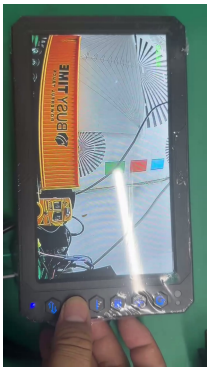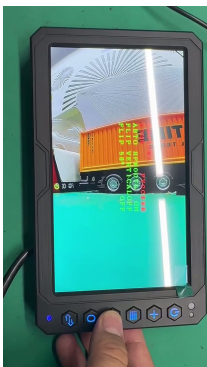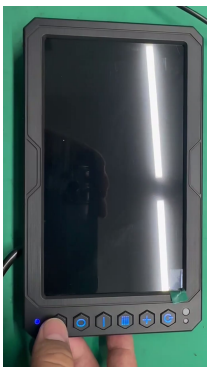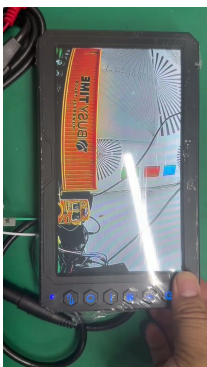

Camera Views & Mounting

