



LRS-362

360 Degree Surround View System

4 cameras | 16 views | auto activation | 16 GB recording | dual CAN

16 views

Auto activation

Built-in recording

Dual CAN

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China

OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

Key Features & Specifications

KEY FEATURES

- **Activates itself:** forward or reverse gear, left or right indicator, double-tap hazard, low-speed radar or the P button - no manual switching
- Remote control for manual view selection when the driver wants a specific angle
- 16 customisable views; the 2D top view can sit on the left or right, and four 3D angles are available
- Radar wall display shows obstacles on the picture as soon as the sensor finds one
- Reversing guide lines can be switched on from the menu (off by default)
- Built-in 16 GB storage records about 16 hours, with a REC status light on the main screen
- Playback by date and time, delete clips, or export the recordings to a USB stick
- Behaviour is configurable per vehicle: start-up 3D rotation, indicator activation, hazard double-tap, radar activation, display-off delay
- Dual CAN, CVBS out, VGA, serial, ACC input and reverse control output - fits the factory harness
- Camera cable colours are fixed for easy service: front black, right red, left blue, rear yellow
- **Kit:** host, four cameras, main cable, extension cables, OBD cable and remote control
- **Customisation:** customer logo on the boot screen and a vehicle-specific 3D model





TECHNICAL SPECIFICATION

Power Supply	Working voltage 12V
Viewing Angle	180°
Cameras	4 x 180 degree fisheye, 2D / 3D bird view
Storage	Built-in or SD card recording
Functions	Panoramic stitching, parking and blind-spot assist
Ordering	Full parameter sheet available on request

Product Views



Installed and Working in Service

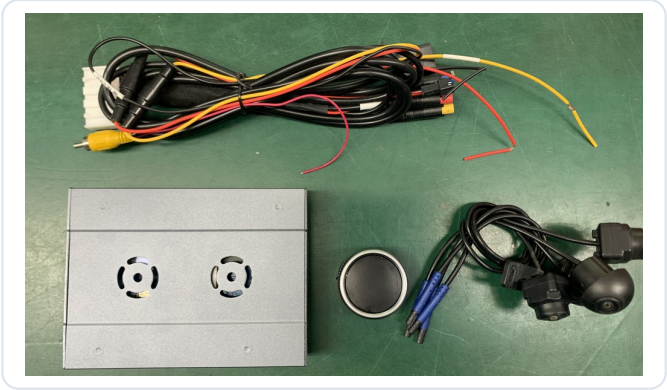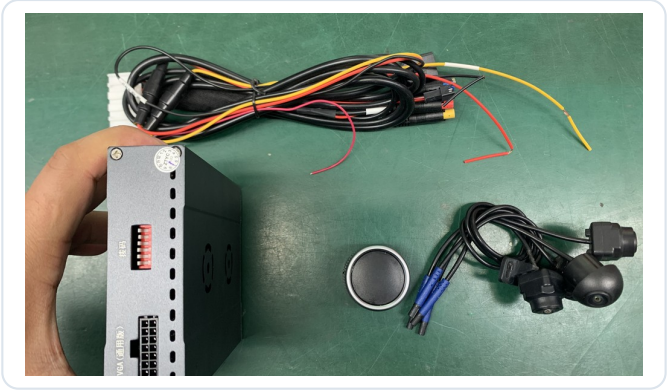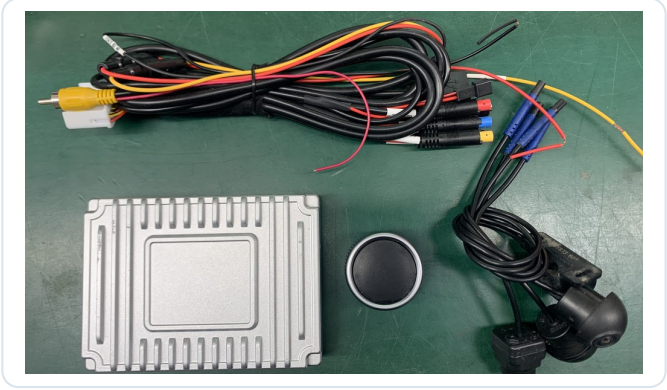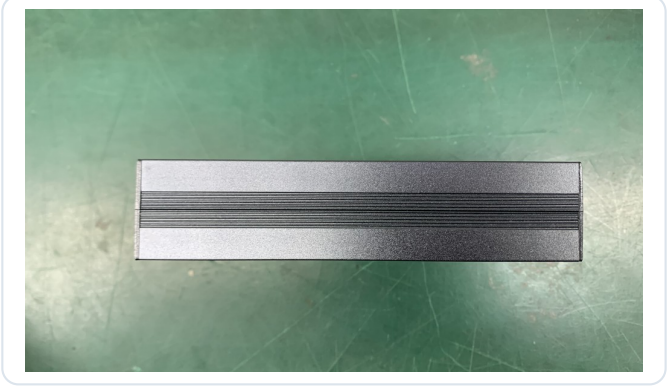

SPECIFICATIONS

Full Technical Specification

Power Supply	Working voltage 12V
Viewing Angle	180°
Cameras	4 x 180 degree fisheye, 2D / 3D bird view
Storage	Built-in or SD card recording
Functions	Panoramic stitching, parking and blind-spot assist
Ordering	Full parameter sheet available on request

ORDERING NOTES

- Confirm the model, screen size or channel count, and the system voltage used on the vehicle.
- Confirm the connector your harness uses (RCA / 4-pin aviation / GX12) and the cable length.
- Confirm PAL or NTSC, image mirroring and whether reversing guide lines are required.





Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street,
Longhua District, Shenzhen, China
OEM & ODM welcome - custom logo, packaging, connectors,
cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

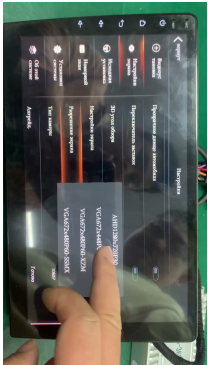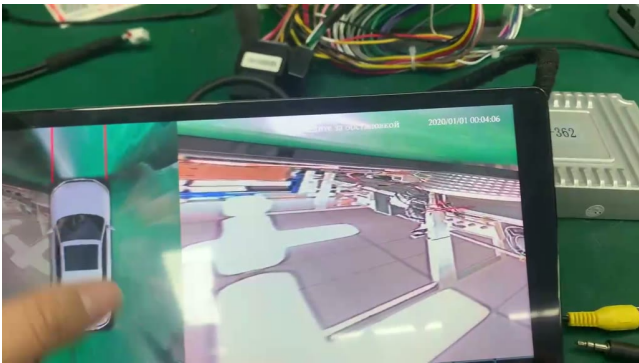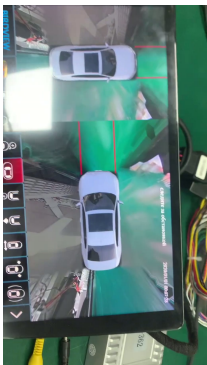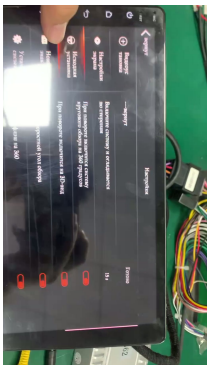

Camera Views & Mounting

