LRS-371AI

8 Channel AI 360 Surround View Host

8 x 1080P AHD in | CVBS / VGA / HDMI / dual AHD out | optional radar and alarm

8 CH AHD **AI blind spot** **Dual AHD out** **Optional radar**

Shenzhen Jifuan Intelligent Technology Co., Ltd.
Building 9, West District, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, China
OEM & ODM welcome - custom logo, packaging, connectors, cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)
info@jfacam.com
www.jfacam.com | www.antuvision.com

OVERVIEW

Key Features & Specifications

KEY FEATURES

- Eight 1080P AHD camera inputs (GX12-4P aviation, regulated 12V): four for the 360 view and four more for monitoring
- **Full output set:** CVBS, VGA (DB15), HDMI and optional dual AHD out for electronic-mirror screens or an MDVR
- Built-in AI vision detects pedestrians and vehicles in all four directions
- Warns in three ways at once: the picture on the monitor, blind-spot indicator lights and a voice announcement
- Links to an outside sound-and-light alarm, so pedestrians are warned as well as the driver
- Optional ultrasonic radar: up to 16 sensors in four directions, working with vehicle speed and the 360 view
- Radar data appears on the 360 vehicle model; supports right-side BSD and lane-change assist
- **Parked security mode:** the radar guards 0.35 m around the vehicle, alarms inside and out, and starts recording (anti fuel and cargo theft)
- CAN bus to ISO 11898 with low-power sleep and network wake-up; reads factory signals such as steering angle and speed
- Voice control for the 360 view and automatic scene switching
- **Storage:** 2.5-inch HDD or SSD 128 GB - 2 TB plus SD card 8-512 GB; H.265, four channels in one 1080P file, about 1.25 GB per hour
- Aluminium host, MIL-STD-810F vibration, ISO-7637 vehicle power, 12-36V wide input with reverse-polarity and TVS / ESD protection

TECHNICAL SPECIFICATION

Power Supply	protection
Resolution	AHD1080P.
Waterproof Rating	level IP68.
Storage	2TB
Channels	4 channels
Cameras	4 x 180 degree fisheye, 2D / 3D bird view
Functions	Panoramic stitching, parking and blind-spot assist
Ordering	Full parameter sheet available on request

STUDIO

Product Views



SPECIFICATIONS

Full Technical Specification

Power Supply	protection
Resolution	AHD1080P.
Waterproof Rating	level IP68.
Storage	2TB
Channels	4 channels
Cameras	4 x 180 degree fisheye, 2D / 3D bird view
Functions	Panoramic stitching, parking and blind-spot assist
Ordering	Full parameter sheet available on request

ORDERING NOTES

- Confirm the model, screen size or channel count, and the system voltage used on the vehicle.
- Confirm the connector your harness uses (RCA / 4-pin aviation / GX12) and the cable length.
- Confirm PAL or NTSC, image mirroring and whether reversing guide lines are required.

Shenzhen Jifuan Intelligent Technology Co., Ltd.

Building 9, West District, Zhangge Community, Fucheng Street, Longhua District, Shenzhen, China

OEM & ODM welcome - custom logo, packaging, connectors, cable length and firmware available on request.

+86 188 7400 7838 (WhatsApp / WeChat)

info@jfacam.com

www.jfacam.com | www.antuvision.com

IN USE

Product in Operation

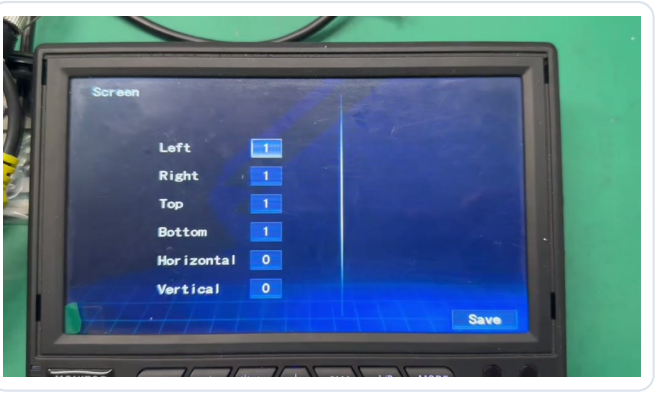

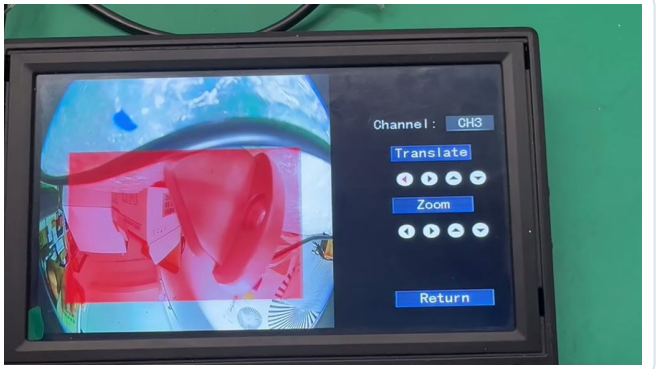

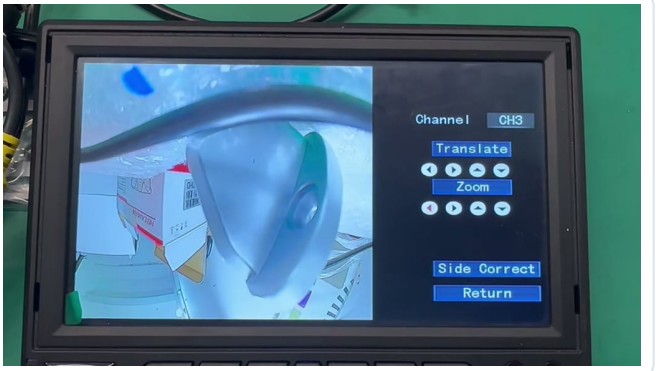

PRODUCT VIEWS

Camera Views & Mounting



WHAT SHIPS

Kit Contents & Accessories