



## Examples for installstion

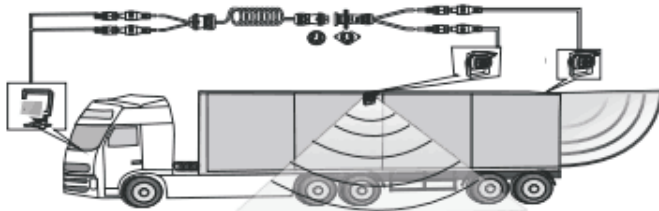

**Monitor system use in truck,bus,express car, special vehicle**

# USER MANUAL

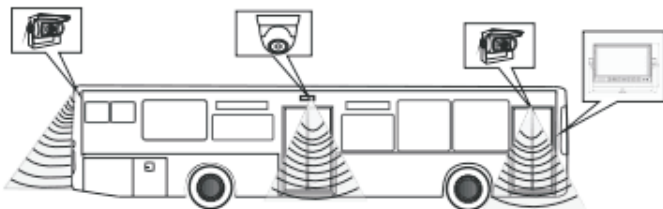

Before operating the Monitor, please read this manual thoroughly and retain it for future reference.

## PRODUCT LIST



Model 1:7"



Model 2:7"



Model 3:7"



Model 4:5"



Model 5:9"




Model 6:10.1"


## KEYSTROKE INSTRUCCION

- |                               |                        |
|-------------------------------|------------------------|
| ①  IR                         | ① IR Receiver          |
| ②  Power                      | ② Power On             |
| ③ V1/V2, AV, CH1/CH2/CH3, CAM | ③ Video Switch         |
| ④ L/R                         | ④ Image Normal/Mirror  |
| ⑤ M; MENU                     | ⑤ Menu                 |
| ⑥ - ▽ ☆                       | ⑥ Decrease setting     |
| ⑦ + △ ☆                       | ⑦ Increase setting     |
| ⑧ MODE                        | ⑧ action               |
| ⑨ AV-IN                       | ⑨ AV input             |
| ⑩                             | ⑩ Dimmer sensor window |

## REMOTE CONTROL

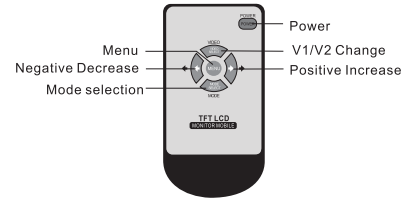

1




2

## SPECIFICATIONS


Model	5inch	7inch	9inch	10.1inch
Aspect ratio	16:9/4:3			
Lumin-ance	LED,250-400cd/m <sup>2</sup>			
Resol-ution	800*RGB*480 1024*RGB*600 ( 7"9"Optional )		1024*RGB*600	
Audio&Video (Model:1,2,4,5) Standard function	2Way video input,2Way audio input,Trigger function for V2 on reversing,			
Audio&Video (Model:3) Standard function	3Way video input,2Way audio input,1AV input,3way reversing trigger line Multi languages display ( Support Char for Mobilephone Optional )			
Optional features system	3Way video input/2 way trigger line /3way reversing trigger line /Distance Grid/Multi languages display PAL&NTSC automatically			
Power supply	9-32V			
OSD Menu	Color, Brightness, Contrast, Volume, Language (English, Deutsch, French, Spanish, Portugal, Italian, Dutch, Simplify Chinese)			
Montior And Camera Connector	RCA/ 4pin connector (Optional)			
Exterior color&sun shade	Black rubber oiling(Model:1. 2. 3. 4. 5. 6) Detachable sunshade (Model:2. 3. 4. 6) non-removable&Stand bracket (Model:1. 5) MetalU type bracket&satant bracket (Model:2. 3. 4. 5. 6)			

## CONNECTION


### 4 pin (7")

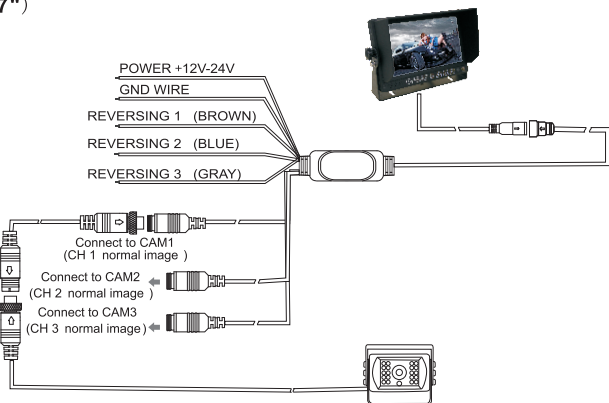

### 4 pin (7")

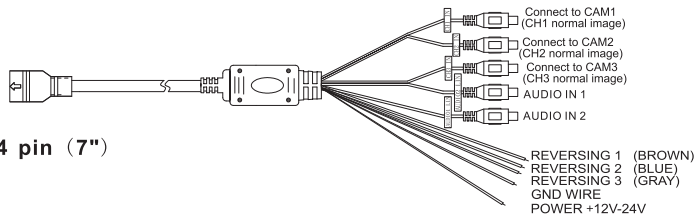


### 4 pin (7"9"10.1")

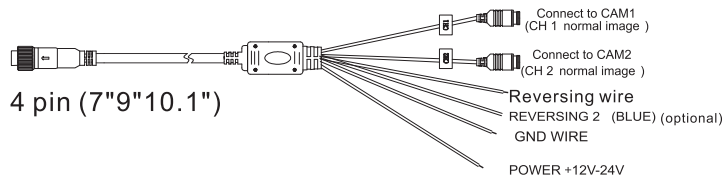



3

### RCA (7"9"10.1")


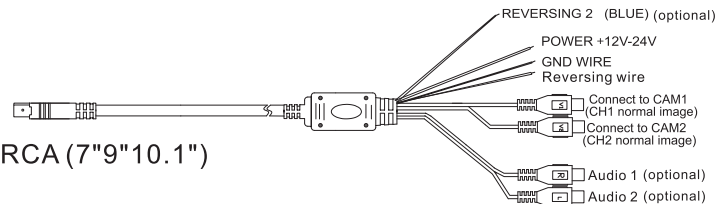


## Monitor Standard Installation



1.Remove the screw around then take out the monitor. Put U type bracket to the right place and adjust angle, prepare 3 screws.(see below pictures)



3.Locking the bracket by screws.Put the monitor into bracket,adjust angle and locking it.(see below pictures)




5Finish installation.The adjustable angel is forwad 30° and backward 30°. User can adjust a suitable angle by themself.(see below pictures)




4

## Monitor Installation(Optional)


1.Firstly please fix the screws with and let fan shaped bracket tight, (see below pictures)

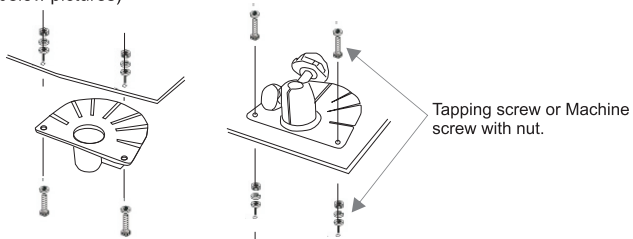


2.Secondly put the metal buckle piece on the top of the fan-shaped bracket into the notch at the back of the monitor.(see below pictures)



3.Move the bracket to the proper location.(see below pictures)




4.To fix the big screws of the bracket until to keep the monitor tight (see below pictures)

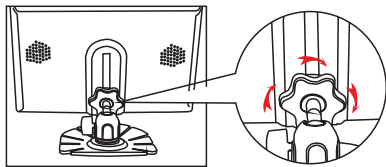





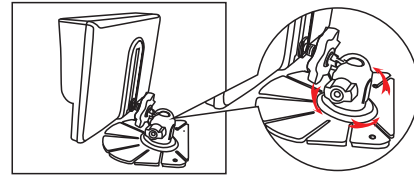

5.If users want to change the direction or angle of the monitor, firstly to loosen the screws on the bottom of the bracket.Then move the monitor

to the desired location then fix the screws on the bottom of the bracket again.(see below pictures)



## Accessory

1.Remote control*1 PCS	2.User manual*1PCS
	
Power cable 1 PCS(optional)	
	
4.Sun shade*1 PCS	5.Bracket Accessories*1 PCS
	

## Announcements

To ensure our safety, the driver should not watch the video files or operate the monitor. The amateurish workers should not disassemble it without permission.

If there are any product problems, please consult the local after-sales agency or take the defective product to the local maintenance department for repairing.

Warning: Please obey the local laws to install the product at a right position.

Our company is not responsibility for the law issue caused by the illegal installing.

Attention: When the weather is very cold. The LCD may be dark with power on.

After the temperature will increase gradually, the LCD should be back to normal.